


Electrical component problems

**Hot surface indicator light
(residual heat indicator) not working**

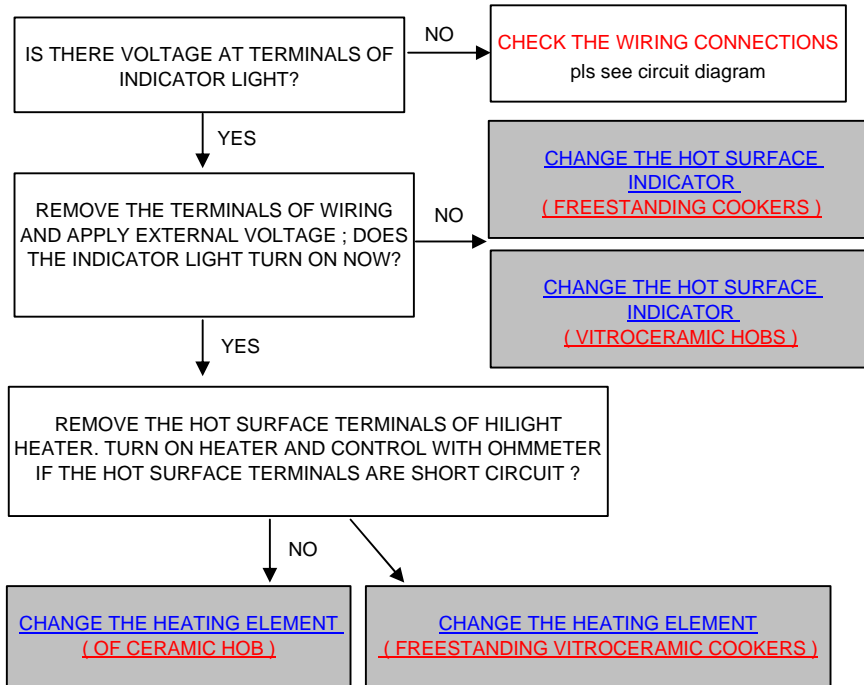

Hot surface indicator light burnt

IF IT IS TOO CLOSE TO THE HEATING ELEMENTS ;

CHANGE THE HOT SURFACE INDICATOR LIGHT




C SERIE VITROCERAMIC HOBS
(FRONT TRIANGULAR TOUCH CONTROLLED)

1. Removing wiring harness :


Unscrew the **hob bottom cover**



Loosen the **silicone cable** – to release the **wiring harness**

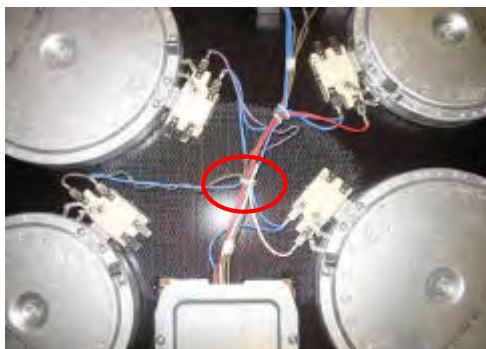

Unscrew the terminal box and then remove :


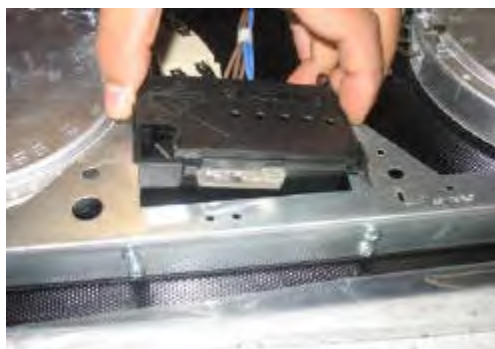


Pull the wiring sockets off terminal box

Please do not forget that rewiring must be done appropriately.



Take the wiring terminals off the heating elements

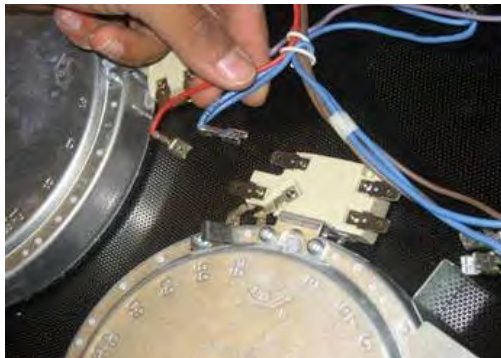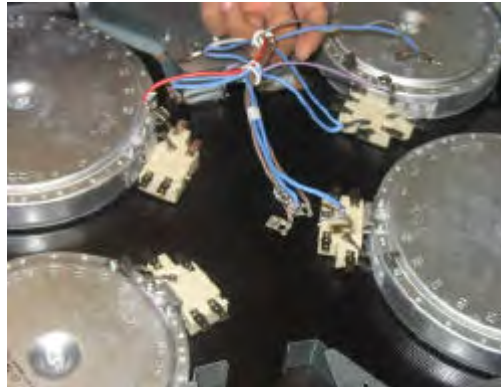

Unscrew the "touch control unit bottom cover"




and then pull off from the hooks on the frame :




Wiring harness becomes free.

Electrical component problems

Highlight heater(s) not working :

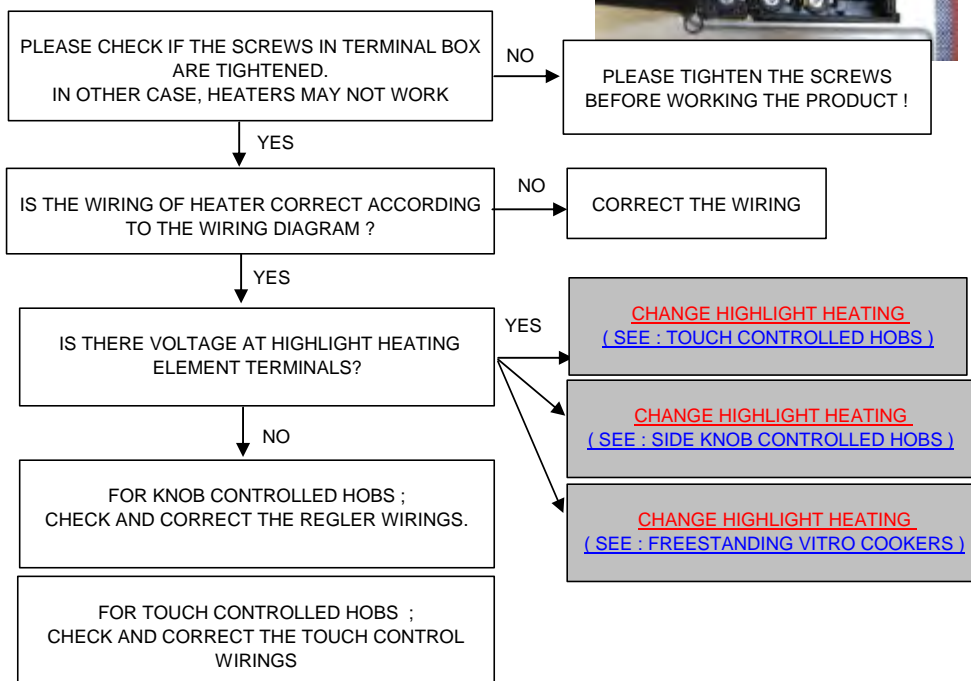

Touch control display errors

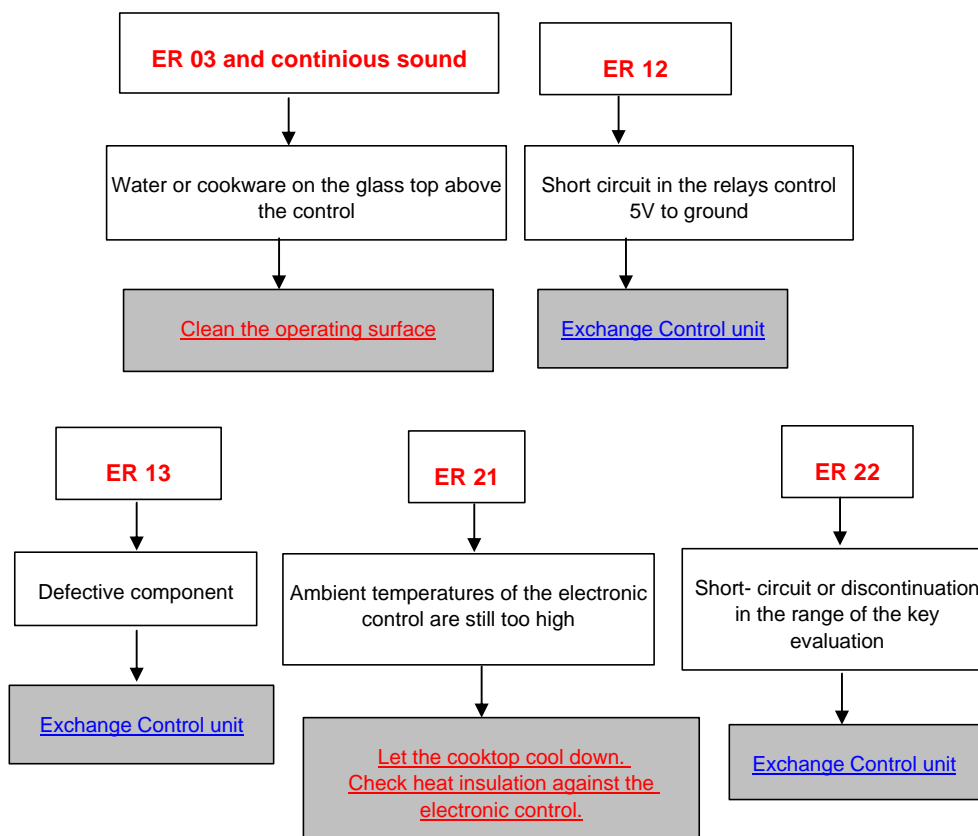




C SERIE VITROCERAMIC HOBS
(FRONT TRIANGULAR TOUCH CONTROLLED)

2. Removing highlight heating elements:

First unscrew (v type) heating element assembly springs

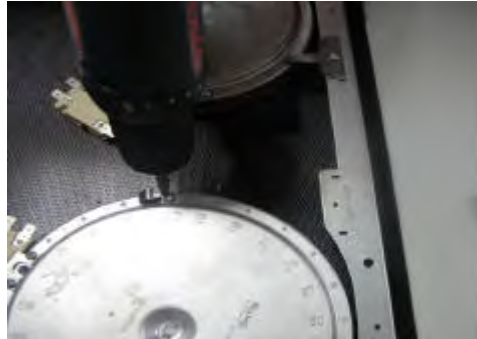

Unscrew (t type) heating element assembly springs
they are screwed according to the matching numbers on heater&frame



Remove (t type)heating element assembly springs from the hob frame



Remove highlight heater




C SERIE VITROCERAMIC HOBS
(RIGHT SIDE KNOB CONTROLLED)



Removing highlight heating elements:

Unscrew the (v type) heating element assembly springs

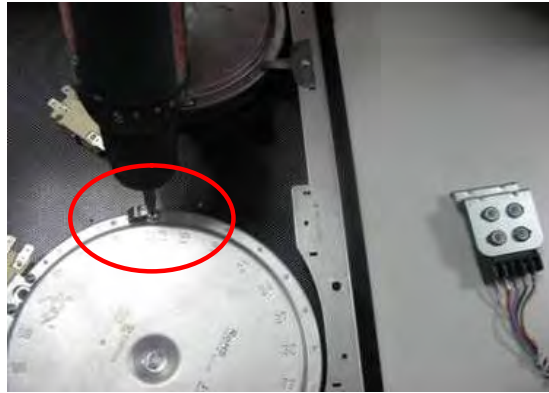


Unscrew (t type) heating element assembly springs
they are screwed according to the matching numbers on heater&frame



Remove (t type) heating element assembly springs from the hob frame




Remove highlight heater

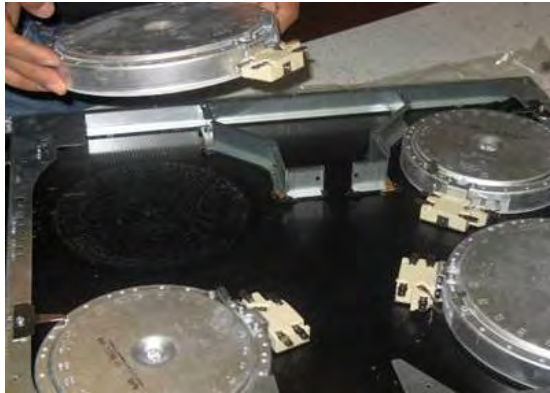


Electrical component problems

Regler doesnt work

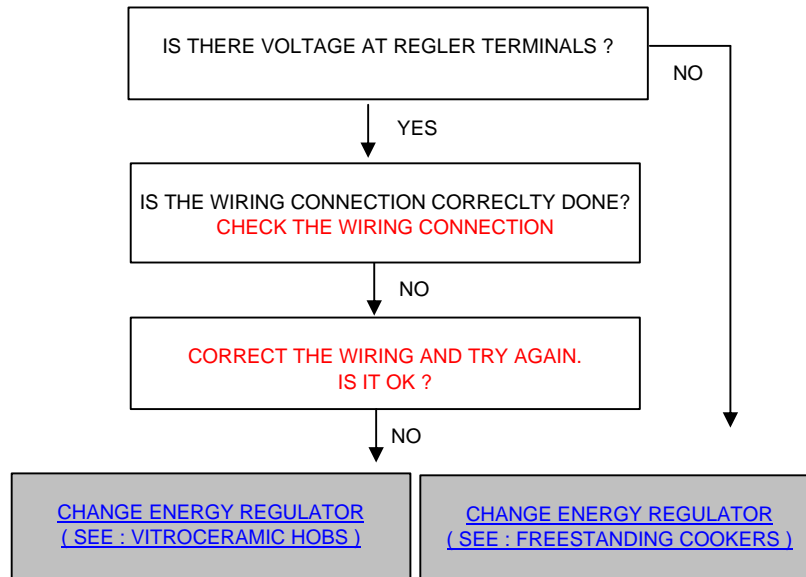

C SERIE VITROCERAMIC HOBS
(RIGHT SIDE KNOB CONTROLLED)




Removing wiring harness :

Unscrew the **hob bottom cover**



Loosen the **silicone cable** – to release the **wiring harness**

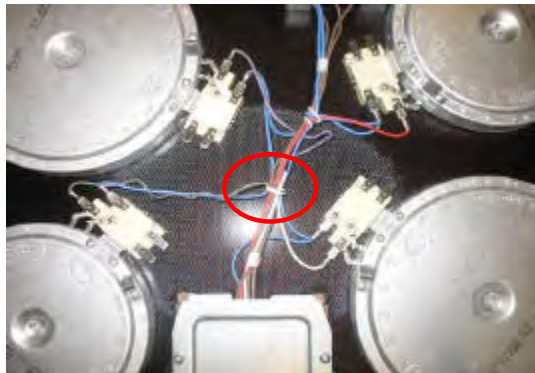


Unscrew **terminal box** and remove.





Pull the wiring sockets off terminal box
Please do not forget that rewiring must be done appropriately.




Remove **terminal box heat insulating cover**

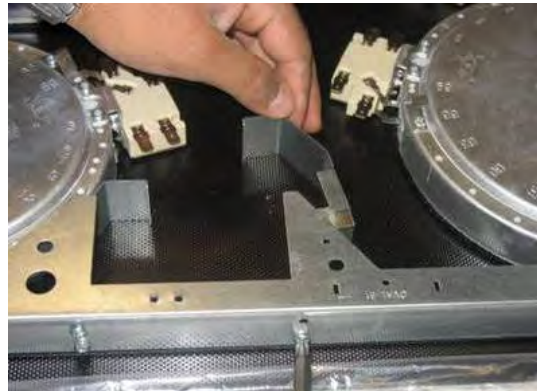

Take the wiring terminals off the heating elements

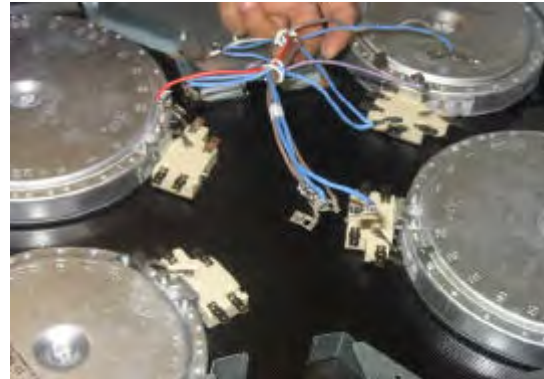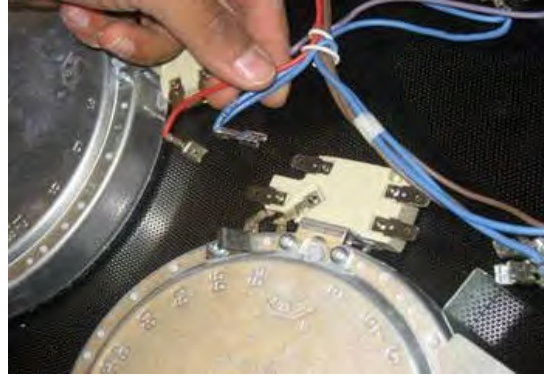

Unscrew the **regulator cover** and then remove the regler

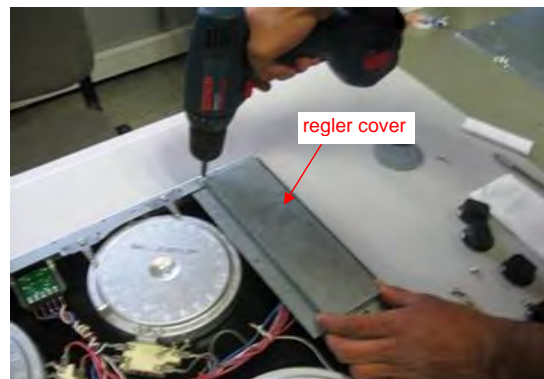



Remove the "hot surface indicator light group"
Wiring connections are free

