



HC60BCXB2


60cm Wall Chimney Box Cooker Hood

Engineered for optimum extraction of fumes, smoke and vapour. The powerful fan removes cooking odours from the kitchen while extremely fine filters trap all grime. It's easy to use, easy to clean and has innovative features and intuitive controls. The five speed brushless motor also provides low maintenance, more reliability, efficiency and is quieter. EEI Energy Class: A+

Brushed Stainless Steel with black glass

Dimensions

Depth	500mm
Height	Ⓐ 600 - 1035mm
Width	Ⓑ 600mm

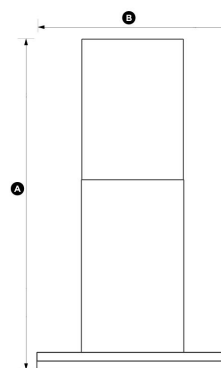

Features & Benefits

Designed to match

Fisher & Paykel's Chimney cooker hood will fit contemporary kitchens and perfectly match the Fisher & Paykel kitchen family.

Effective and quiet

This cooker hood offers four fan speeds plus a boost function for fast removal of odours and steam. Multi-layered filters trap grease effectively, and deliver even extraction across the entire surface. As odours can linger in the kitchen well after cooking is finished, the timer feature keeps the cooker hood working for up to 15 minutes before automatically turning itself off.

Precise control

Fisher & Paykel's Chimney cooker hood features a sleek touch-control panel. Long life, low energy, dimmable LED lights provide superb illumination over the entire cooking surface.

Easy cleaning

Designed for simple removal, the filters are easy to clean and dishwasher safe. The stainless steel mesh cover is easy to wipe clean, and an interior, wipeable airflow balancing plate makes internal cleaning effortless.

Specifications

Cleaning

Dishwasher safe filters	2
Filter cleaning alert	•
Stainless steel filter cover	•

Controls

Control type	Capacitive-touch
Dimmable lights	•
Light type	LED 2 x 4W
Timer function	•

Energy

Energy class EEI	A+
------------------	----



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 08000 886 486 W fisherpaykel.com

Fan ratings

Maximum motor performance	1100 m ³ /hr
Maximum pressured air movement EN61591 at boost	710 m ³ /hr
Maximum sound rating at boost	67 dBA
Speed 1 Pressured air movement EN61591	200 m ³ /hr
Speed 1 sound rating	40 dBA
Speed 4 Pressured air movement EN61591	525 m ³ /hr
Speed 4 sound rating	64 dBA

Installation

Air outlet	150 mm
Ducted	Top or back extraction
Internal Blower Included	•
Recirculated	Optional - top extraction
Two-Piece Height Adjustable Flue	•

Parts & Accessories

Chimney extension	792492
Light bulb	792556
Replacement aluminium filter	791938

Performance

Airflow balancing plate	•
Energy class EEl	A+
Extraction type	Surface
Filter type	Mesh with Stainless Steel filter cover
Number of filters	2
Speeds	4 plus boost

Power requirement

Lighting power	7 W
Motor power	130 W
Rated current	3 A
Supply Frequency	50 Hz
Supply voltage	220-240 V
Total Power	137

Warranty

Warranty	2 years
----------	---------

SKU	50000
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © © Fisher & Paykel Appliances Ltd 2017

Other product downloads available at fisherpaykel.com

fisherpaykel.com